

Wooden Skirtings Standard


INTERIOR



## Wooden Skirtings Standard

### Dimensions

	A total height incl. 1,5 mm glazing tape	B Thickness	C Length	D Construction	E Kind of wood
<b>F4a</b>	65	20	2000–4000	Solid	Oak
<b>F4b</b>	45	20	2000–4000	Solid	Oak
<b>F18</b>	94	20	2000–4000	Solid	Oak
<b>S55</b>	55	17	2000–4000	Solid	Oak

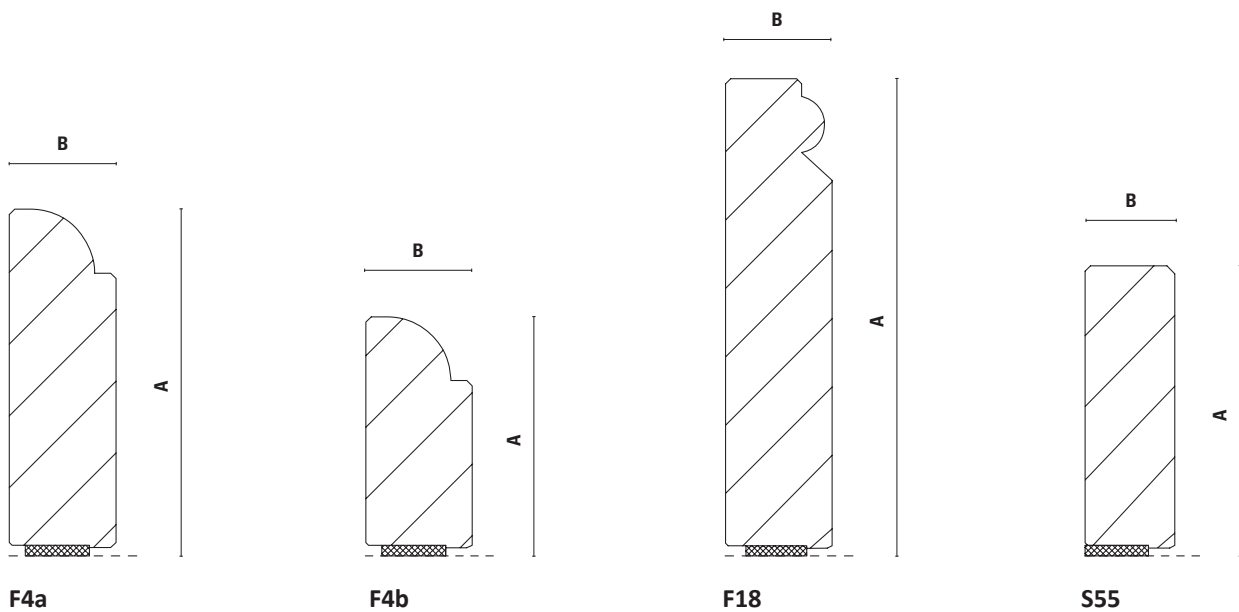


All Dimensions in mm

## Specifications

### Profile F4a

<b>Height A**</b>	65 mm
<b>Thickness B**</b>	20 mm
<b>Length C</b>	2000–4000 mm
<b>Construction</b>	Solid Oak
<b>Colours*</b>	16 Colours (E11–E116) special colours on request
<b>Selection</b>	01 Fine
<b>Treatment</b>	01 Brushed
<b>Sound protection according to DIN 4109</b>	separation from the flooring by a waterresistant, elastic glazing tape
<b>Installation*</b>	Screwed with ball head screws from brass or stainless steel* glued installation according to DIN 18356
<b>Requirements</b>	Planarity of the wall according to DIN 18202 chart 3, line 7, increased requirements plastered wall completely mounted flooring guidelines to sound protection according to DIN 4109

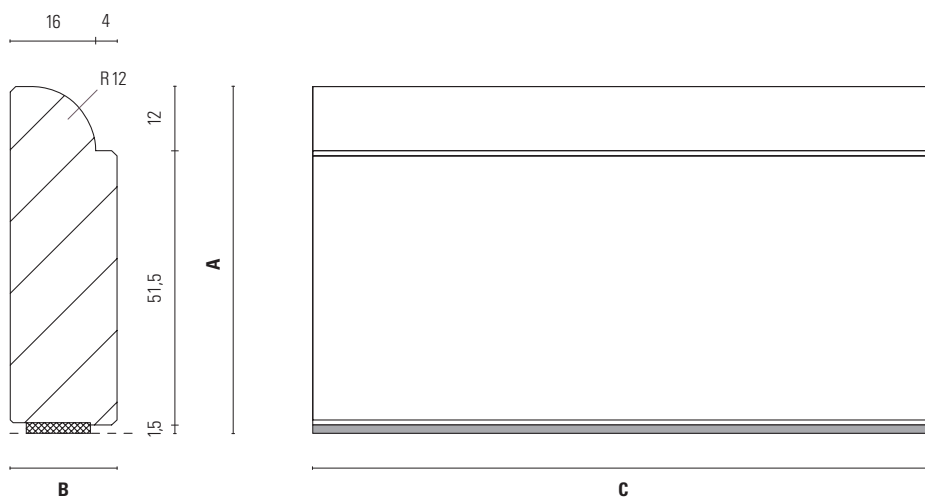


All dimensions in mm | \*to choose | \*\*different measurements on request

## Specifications

### Profile F4b

<b>Height A**</b>	45 mm
<b>Thickness B**</b>	20 mm
<b>Length C</b>	2000–4000 mm
<b>Construction</b>	Solid Oak
<b>Colours*</b>	16 Colours (E11–E116) special colours on request
<b>Selection</b>	01 Fine
<b>Treatment</b>	01 Brushed
<b>Sound protection according to DIN 4109</b>	separation from the flooring by a waterresistant, elastic glazing tape
<b>Installation*</b>	Screwed with ball head screws from brass or stainless steel* glued installation according to DIN 18356
<b>Requirements</b>	Plasterity of the wall according to DIN 18202 chart 3, line 7, increased requirements plastered wall completely mounted flooring guidelines to sound protection according to DIN 4109

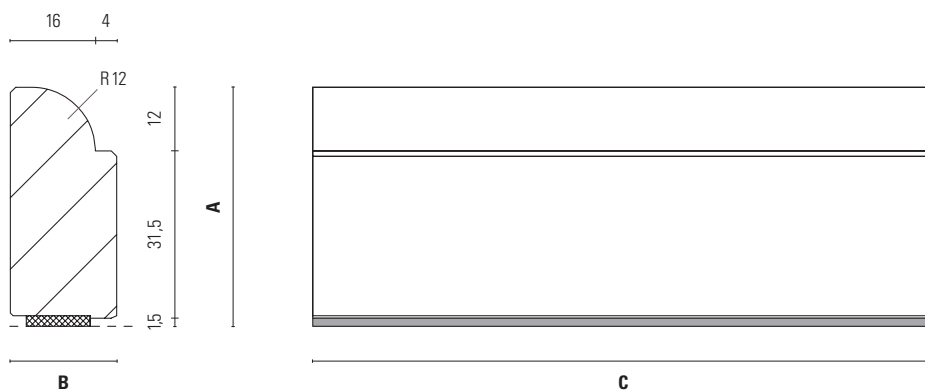


All dimensions in mm | \*to choose | \*\*different measurements on request

## Specifications

### Profile F18

<b>Height A**</b>	94 mm
<b>Thickness B**</b>	20 mm
<b>Length C</b>	2000–4000 mm
<b>Construction</b>	Solid Oak
<b>Colours*</b>	16 Colours (E11–E116) special colours on request
<b>Selection</b>	01 Fine
<b>Treatment</b>	01 Brushed
<b>Sound protection according to DIN 4109</b>	separation from the flooring by a waterresistant, elastic glazing tape
<b>Installation*</b>	Screwed with ball head screws from brass or stainless steel* glued installation according to DIN 18356
<b>Requirements</b>	Palanrity of the wall according to DIN 18202 chart 3, line 7, increased requirements plastered wall completely mounted flooring guidelines to sound protection according to DIN 4109

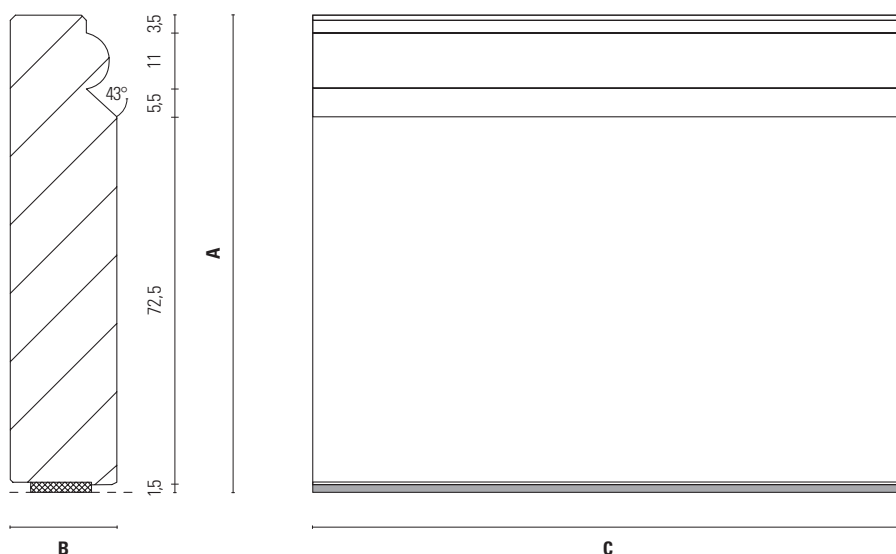


All dimensions in mm | \*to choose | \*\*different measurements on request

## Specifications

### Profile S55

<b>Height A**</b>	55 mm
<b>Thickness B**</b>	17 mm
<b>Length C</b>	2000–4000 mm
<b>Construction</b>	Solid Oak
<b>Colours*</b>	16 Colours (E11–E116) special colours on request
<b>Selection</b>	01 Fine
<b>Treatment</b>	01 Brushed
<b>Sound protection according to DIN 4109</b>	separation from the flooring by a waterresistant, elastic glazing tape
<b>Installation*</b>	Screwed with ball head screws from brass or stainless steel* glued installation according to DIN 18356
<b>Requirements</b>	Planarity of the wall according to DIN 18202 chart 3, line 7, increased requirements plastered wall completely mounted flooring guidelines to sound protection according to DIN 4109

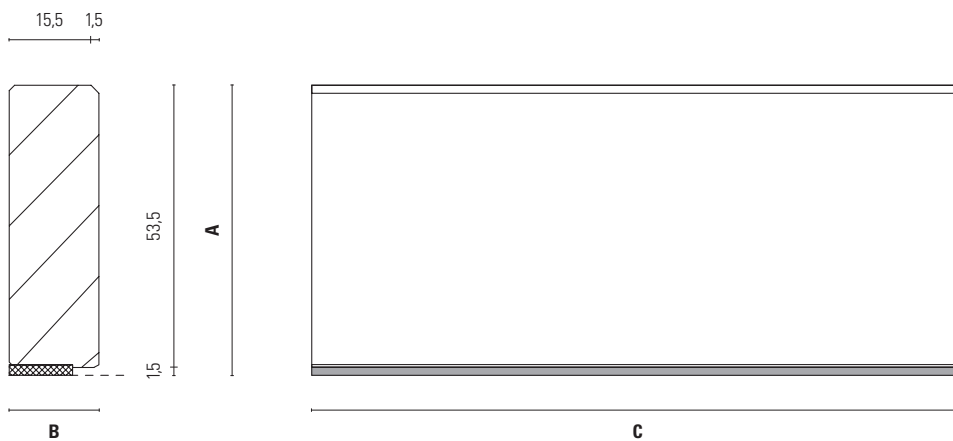

All dimensions in mm | \*to choose | \*\*different measurements on request